SVN Nylonisolerede Spadeterminaler 19A-48A, Kobber

Model No. JW-TM05



SPECIFICATIONS

Strøm	19A-48A
Boltdiameter	3,2-10,5 mm
Materiale	Kobber
Temperatur	75/105 grader
Skede	Nylon/PVC
Overfladebehandling	Tinbelægning

SVN nylonisolerede spadeterminaler, kontinuerlig kobberledning endeterminal, bolt splejseterminal, spade terminal, Svn spade terminal, kobber terminal bolt

Spadeisolerede terminaler Roll

Sikker og sikker crimping (til fleksible ledninger)

Aktuel: 19A-48A

Boltdiameter: 3,2-10,5 mm

Materiale Kobber

Temperatur 75/105 grader

Skede Nylon/PVC

Overfladebehandling Tinbelægning

With insulation sheath fork terminal

Safe and secure crimping (for flexible cords)
Current: 19A-48A
Bolt diameter: 3.2~10.5mm



Stability means that the foundation of the terminal cannot fall off and cannot be broken

It is made by stamping process and stamped on a stamping press, which can effectively resist interference and increase the service life.



Reliable quality of real materials

Exquisite and good selection of materials makes the product
High safety performance and long service life

Copper tinned terminal block

High-quality red copper
conductive must be strong
Surface tin plating process
to resist oxidation



PVC insulation
Flame retardant material

Two materials optional

Nylon insulation
Flame retardant material



With insulation sheath blade terminal


Current: 18A-48A
Copper has good conductivity
Flame retardant and tinned



With insulation sheath spring terminal



Product parameters

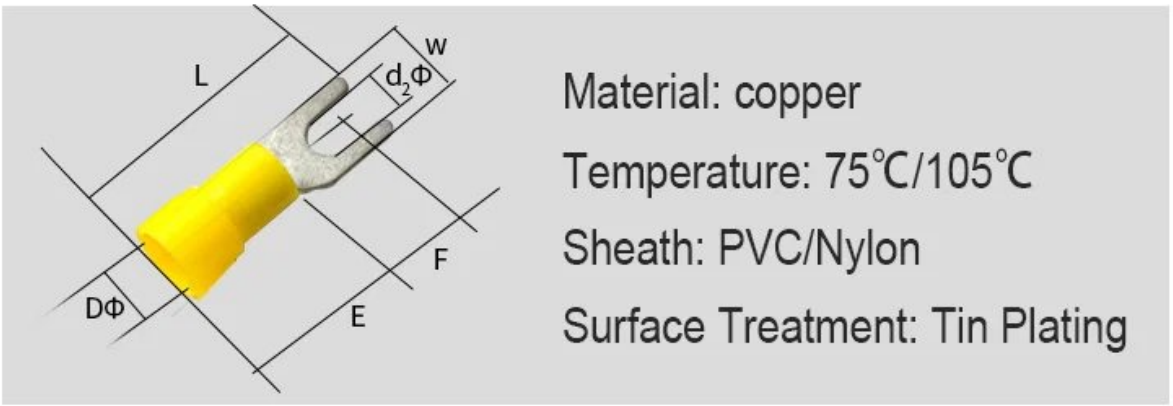

Red (nylon/PVC [add P at the back] optional)

Item NO	Cable Sze A.W.G	Thickness (mm)	Max Current	USA Screw	ScrewDia.d2(mm)	size				DΦ
						W	L	F	E	
SVN1.25- 3	0.5-1.5 (22-16)	0.75	19A	#4	3.2	5.7	21.2	6.5	10.0	4.0
SVN1.25-3.5S				#6	3.7	5.7	21 2	6.5		
SVN1.25 3.5L				#6	3.7	6.4	212	6.5		
SVN1.25- 4 S				#8	4.3	6.4	21 2	6.5		
SVN1.25-4 M				#8	4.3	7. 2	21.2	6.5		
SVN1.25-4 L				#8	4.3	8.1	21 2	6.5		
SVN1.25-5 S				#10	5.3	8.1	21 2	6.5		
SVN1.25-5L				#10	5.3	9.5	21 2	6.5		
SVN1.25- -6 S				1/4	6.4	9.5	21 2	6.5		
SVN1.25-6L				1/4	6.4	12.0	27.6	11.0		

FAQ

Hvilke strømklasser dækker SVN Nylon Insulated Spade Terminals?

SVN-serien dækker strømklasser fra 19A til 48A med en kobberkontakt. Dette område gør det muligt for én terminalfamilie at betjene både let styreledningsføring og tungere strømforbindelser.

Hvilke boltdiametre er SVN Nylon Insulated Spade Terminals designet til at passe til?

Disse gaffelterminaler accepterer boltdiametre fra 3.2 mm til 10.5 mm. Det dækker en bred vifte af studsestørrelser, som almindeligvis findes i kontrolpaneler og udstyrsledningsføring.

Hvordan matcher jeg en SVN Nylon Insulated Spade Terminal til min studs og belastning?

Vælg den boltdiameter, der passer til din studs, fra 3.2 til 10.5 mm, og bekræft derefter, at kredsløbsstrømmen ligger inden for området 19A til 48A, som serien dækker.